

# UV Rated • Non-metallic QuickLATCH™

More on reverse!

*Works just like a Pipe Hanger • Easy to Install! • NEW SIZES!*



*Mounts to stud, wall or strut*



Costs the same as a Steel Pipe Hanger w/ bolt & nut

**Saves 25 seconds per installation!**

*more than 15¢ each for \$22/hr labor*


Fast and easy to install, the one-piece, non-metallic QuickLATCH mounts to walls, metal strut and studs, and threaded rod up to 1/4-20.

It fits 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", and NOW 2-1/2", 3", 3-1/2", and 4" EMT, rigid, IMC and PVC. The larger 2-1/2" to 4" sizes have an additional opening for the optional securing of tie wire or cable tie.


Installation is fast and easy. Snap the conduit into QuickLATCH, where it locks automatically.

Other features:

- Corrosion resistance
- Horizontal or vertical mounting
- Integral slot prevents nut from spinning
- Listed for environmental air handling spaces, per 2005 NEC code requirement 300-22(c)
- UV rating for outdoor applications

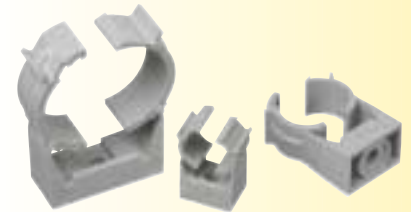

NM2000



Integral slot  
Prevents nut from spinning

Additional Opening for OPTIONAL securing of tie wire

NM2080



**Arlington**  
1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com

# UV Rated • Non-metallic **QuickLATCH™**

**NEW SIZES!**

*Use it Anywhere you would use a Pipe Hanger • Easy to Install!*

Catalog #	UPC/DCI/NAED Mfg. #01 8997	Rigid, IMC & PVC Sizes	EMT Size	LT Size	FLEX Size	ENT Size	Copper Tubing	Copper Pipe	Std Pkg
NM1900	54514	---	---	5/16	---	---	1/2	---	100
NM2000	54515	---	1/2	3/8	---	---	---	3/8	100
NM2005	54525	1/2	---	1/2	1/2	1/2	---	1/2	100
NM2010	54516	---	3/4	---	---	---	3/4	---	100
NM2015	54526	3/4	---	3/4	3/4	3/4	---	3/4	100
NM2020	54517	---	1	---	---	---	1	---	100
NM2025	54518	1	---	1	1	1	---	1	100
NM2030	54528	---	1-1/4	---	---	---	1-1/4	---	100
NM2040	54519	1-1/4	1-1/2	---	---	---	1-1/2	1-1/4	100
NM2045	54544	1-1/2	---	1-1/2	1-1/2	---	---	1-1/2	100
NM2150	54547	---	---	---	---	---	2	---	50
NM2050	54520	2	2	2	2	---	2	---	50
<b>NEW</b> NM2060	54521	2-1/2	2-1/2	2-1/2	2-1/2	---	---	---	50
NM2070	54522	3	3	3	3	---	---	---	25
NM2080	54523	3-1/2	3-1/2	3-1/2	3-1/2	---	---	---	25
NM2090	54524	4	4	4	4	---	---	---	10



Mount to surface with a screw.



Press down on pipe to lock it firmly in place.



**Removable.** Use a screwdriver to lift tab.



*on  
Threaded  
Rod  
and a  
Beam  
Clamp*



**Arlington**  
1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com

Distributed by