

# IN BOX™ for New Brick

**LOOK!**  
more on  
reverse

## Non-metallic • Low Profile Box with Adapter Sleeve



White  
DHB1C  
Cover removed  
to show installation



Brown  
DHB1BRC  
Finished installation

### Meets NEC 2008

Section 406-8; for the protection of exterior outlets which require the use of a weatherproof-while-in-use cover for all outdoor 15 or 20 AMP receptacles.



**Installs in  
the wall –  
Less  
shows  
outside!**

Arlington's **IN-BOX™** – the recessed weatherproof-in-use electrical box for new brick offers features that get the job done fast – and right!

Our new brick IN BOX in both horizontal or vertical orientation, comes with a protective adapter sleeve which keeps mortar out of the box while the brick mason completes his installation.

When you're ready to finish the electrical installation, just slip the clean IN-BOX into the sleeve...easy!


- One-piece design replaces the installation of an electrical box and bubble cover assembly
- Clean, great-looking weatherproof installation
- Built-in anchor tabs seat adapter sleeve into mortar for a super secure installation
- Kit includes IN-BOX electrical box in brown to match the brick, or white with a clear cover, and an NM cable connector – also an adapter sleeve, caulk, one standard duplex, and one GFCI wall plate.

**A**    
**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
[www.aifittings.com](http://www.aifittings.com)

# IN BOX™ for New Brick

## Non-metallic • Low Profile Box with Adapter Sleeve

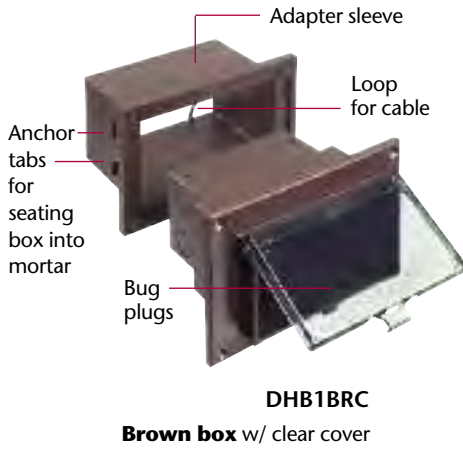

**1** Mortar in adapter sleeve. Pull wire and tie off to loop in adapter sleeve.



**2** When ready to complete...apply supplied caulk as shown and press around edges of adapter sleeve.



**3** Install the supplied NM cable connector and wire. Insert the clean IN BOX into the adapter sleeve.



**4** Attach IN BOX with the screws provided. Install wiring device per manufacturer's instructions.



**5** Install wiring device. IN BOX accepts most single gang wiring devices and uses a standard indoor wall plate. Plug in a cord for a weatherproof-while-in-use finished installation.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	ORIENTATION & COLOR	UNIT PKG	STD PKG
DHB1C	54880	Horiz/Clear cover/White box	1	4
DHB1W	54882	Horiz/White cover/White box	1	4
DHB1BRC	54881	Horiz/Clear cover/Brown box	1	4
DHB1BR	54875	Horiz/Brown cover/Brown box	1	4
DVB1C	43609	Vertical/Clear cover/White box	1	4
DVB1W	43620	Vertical/White cover/White box	1	4
DVB1BRC	43608	Vertical/Clear cover/Brown box	1	4
DVB1BR	43595	Vertical/Brown cover/Brown box	1	4

IN BOX for new brick includes box w/ weatherproof-in-use cover, adapter sleeve, installed bug plugs, (1) standard duplex and (1) GFCI face plate, installation screws, (1) NM cable connector, (1) roll of caulk and a disposable mud cover.

Add suffix 'CG' to Catalog # when ordering for use in Canada, i.e. DHB1CGC.

Distributed by



1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
[www.aifittings.com](http://www.aifittings.com)